

# Ultra S600

Scan for ratings  
and reviews



Enhancing safety  
as only 3M can



Glass Type (All 1/4")	Single Pane Clear	Single Pane Tinted	Double Pane Clear	Double Pane Tinted
Visible Light Transmitted	84%	47%	73%	41%
Total Solar Energy Rejected	22%	41%	32%	50%
UV Light Rejected	99%	99%	99%	99%
Glare Reduction	5%	11%	8%	8%
Visible Light Reflected	10%	6%	18%	8%
Shading Coefficient	0.90	0.68	0.78	0.55
Emissivity	0.89	0.89	0.89	0.89
U Value	1.10	1.03	0.47	0.50

Performance data generated for a typical film on 6mm glass using applicable industry test methods and standards.




INDUSTRY  
PARTNER

## Renewable Energy Division

3M Center, Building 235-2S-27  
St. Paul, MN 55144-1000

Printed in U.S.A. © 3M 2011 70-0709-0181-7 (111.5)ii



Exterior View


For color and appearance on our sample cards, no UV Protection or Abrasion Coating has been applied.



## Safety & Security Window Films

### Performance Results:

Visible Light Transmitted	84%
Total Solar Energy Rejected	22%
UV Light Rejected	99%
Glare Reduction	5%
Visible Light Reflected	10%

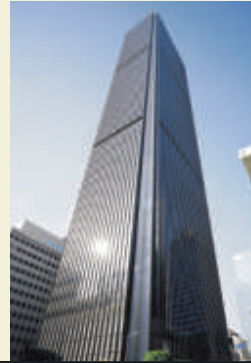

## Ultra S600

Scan for ratings  
and reviews



Enhancing safety  
as only 3M can



ULTRA600

### Ultra S600 Benefits:

- 3M patented technology utilizes many microlayers in a 6 mil film to provide enormous strength and tear resistance compared to standard PET films
- Improves personal, property and asset protection from hurricanes, blasts and earthquakes
- Comprehensive 3M manufacturer's warranty
- Reduces fading and helps protect furnishings
- Deters smash and grab burglaries
- Meets Safety Glazing Standard CPSC 16 CFR Category II (400 ft./lb.) and ANSI Z97.1, and passes Intensified Weathering Test

Interior View